

HSN HINGED STOP COLLAR WITH SPIRAL NAIL

ENGINEERING SOLUTIONS FOR ONSHORE WELLS


Stop collar with spiral nail installation for quick fitment in onshore wells. The HSN is developed to complement our range of hinged centralizer for vertical and horizontal wellbore sections.



Made from the same material as our bow spring centralizers, the HSN is developed for use in less deviated wells.

The spiral nail is driven firmly into internal grooves which locks the stop collar against the casing, providing maximum annular clearance, improving installation and reducing rig time



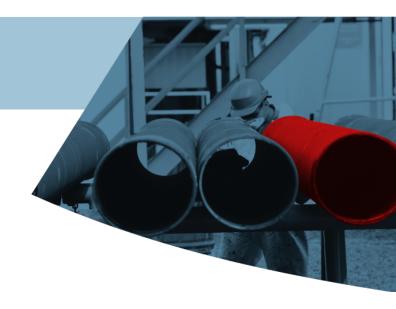

CENTRALIZERS


HSN stop collars are developed as counterparts to Centek's hinged centralizers for less challenging wells

FEATURES AND BENEFITS

- Economic choice
- Quick installation
- Low profile for low annular clearances
- For use with standard casing grades

TARGET APPLICATIONS

- Centek QA
- Less demanding well conditions
- Onshore
- Surface casing and vertical sections





CORE PRODUCT SIZING*

	PART NUMBER		PART NUMBER
Product size	Stop Collar	Product	Stop Collar
4 1/2" ID	0412-HSN	9 5/8" ID	0958- HSN
5 1/2" ID	0512- HSN	13 3/8" ID	1338- HSN
7" ID	0700- HSN	18 5/8" ID	1858- HSN

^{*}custom sizes are available. Speak to your sales representative for more information.

FULL STRING SOLUTION - STOP COLLARS

WELL TYPE	ONSHORE		ONSHORE + OFFSHORE				
WELL LEVEL	L1+L2		L2	(L1+L2)+L3+L4			
PRODUCT NAME	HSN	HBF	OSO	0080	OOSH	HDSO	HDSH
DESCRIPTION	Hinged stop collar with spiral nail	Hinged stop stop collar with draw bolt	Slip on stop collar with set screws	Slip on stop collar with set screws	Hinged, stop collar with set screws	Heavy duty, slip on stop collar with set screws	Hinged, heavy duty stop collar with set screws
RUNABILITY (0-8)	4	6	8	8	8	8	8
STRENGTH (0-8)	4	5	6	7	7	8	8

For more information talk to our Global Sales team today or use our Product Selector Tool to find the right product for your application – sales@centekgroup.com